

Caratteristiche

Icematic introduce la nuova gamma di abbattitori rapidi di temperatura ST, macchinari nati per migliorare qualità e organizzazione del lavoro. Grande potenza, versatilità, facilità d'uso ed affidabilità sono le caratteristiche più importanti degli abbattitori Icematic ST

- Comandi a membrana
- Nuova scheda elettronica con comandi soft touch: intuitiva e facile da utilizzare e completa di tutte le funzioni necessarie ai vari processi di lavorazione
- Ventilatore con pale anticorrosione
- Sonda ad ago conica

OPTIONAL:

- Sterilizzazione ad Ozono O3
- USB Recorder
- Kit ruote
- Struttura pasticceria passo variabile
- 1 Coppia Guide INOX per KIT passo variabile (10 mm)



Features

Icematic is now introducing the new ST range of blast chillers and blast freezers. These machines are designed to improve the quality and organization of work. Powerful, versatile, easy to use and reliable. These are the most important features of Icematic blast chillers-freezers

- Control panel
- New control panel: intuitive, and extremely easy to use with all the functions necessary for the various processes
- Anti-corrosion fan blades
- Conic core probe

OPTIONAL:

- Ozon - O3 sterilization
- USB Recorder
- Castors kit
- Special structure for pastry with 10 mm adjustable pitch
- 1 pair of stainless steel guides for variable pitch structure (10 mm)

Capacità - Capacity


40 kg

+90°C → +3°C


28 kg

+90°C → -18°C

15

 Teglie / Trays
GN 1/1
600x400 mm




68 mm

Passo Teglie / Trays Pitch

Caratteristiche - Features

Alimentazione Elettrica Power supply	400V/3N/50HZ	400V/3N/50HZ	
Codice Prodotto Code number	ST15-40 A	ST15-40 W	
Lunghezza esterna Outside length	800 mm	800 mm	
Altezza esterna Height	1950-2005 (1954) mm	1950-2005 (1954) mm	
Profondità Depth	800 mm	800 mm	
Capacità Capacity GN 1/1	15	15	
Compressore Compressor	HERMETIC	HERMETIC	
Potenza Frigorifera Refrigeration Power (-10°C/+45°C)	5443 W	5443 W	
Fluido refrigerante Refrigeration Fluid	2200 g - R404A (GWP3922)	2200 g - R404A (GWP3922)	
Ton CO2 equiv.	8,63	8,6	

Dimensioni- Dimensions

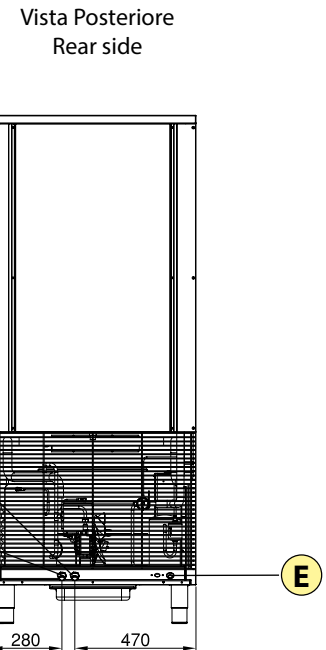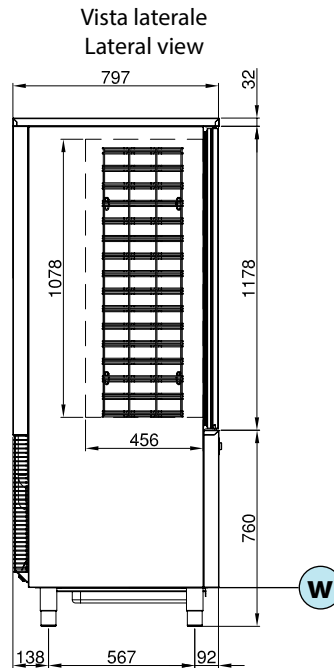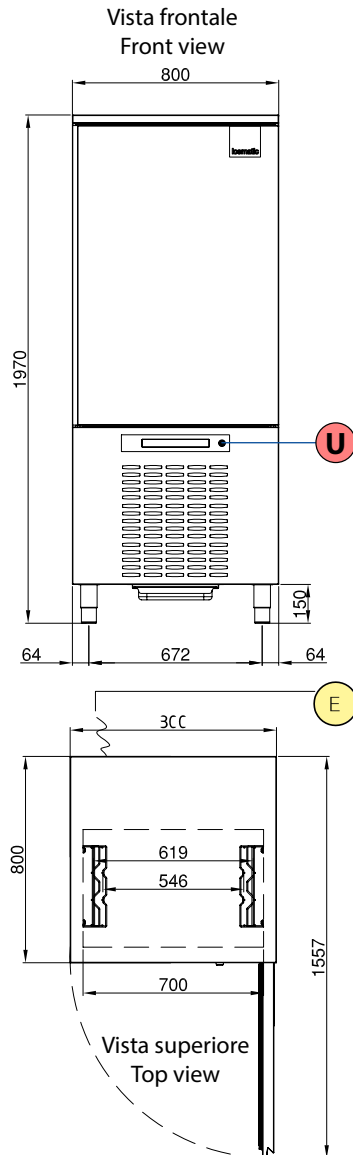

- E** ELECTRICAL CABLE SUPPLY
ALIMENTAZIONE ELETTRICA
- W** DRAINAGE DISCHARGE
SCARICO ACQUA
- S** ATTACCO ENTRATA ACQUA 3/4" GAS
(SOLO CONDENSAZIONE AD ACQUA)
WATER INLET CONNECTION 3/4" GAS
(ONLY WATER CONDENSATION)
- D** ATTACCO USCITA ACQUA 3/4" GAS
(SOLO CONDENSAZIONE AD ACQUA)
WATER OUTLET CONNECTION 3/4" GAS
(ONLY WATER CONDENSATION)
- U** USB KEY (OPTIONAL)

Dati consumo / Consumption data

0,100 kWh/kg

Ciclo Cycle	Durata Duration	Discesa T° Down T°
Neg	102 min	+65°C → +10°C

0,379 kWh/kg

Ciclo Cycle	Durata Duration	Discesa T° Down T°
Neg	258 min	+65°C → -18°C

Quadro comandi / Control panel

